




**TOMAHAWK WATERMAIN
CLEANING
CAMBRIDGE, ONTARIO
AUGUST, 2012**

**Brian Thorogood P.Eng
Envirolitics.ca
800 267-9810**



Cambridge, Ontario – Coal Tar and Corrosion Removal

- Completed August 2012
- 390 meters cleaned in 3.5 working days
- 150 mm (6”) coal tar lined pipe
- First known successful removal of coal tar lining in small diameter pipe, 95 to 98% removal.
- 1960’s cast iron pipe, structurally sound
- Acuro fast-set polymeric spray in place (SIPP) liner applied by Caesar’s Infrastructure
- Validated bond of liner to pipe surpassing 250 psi.

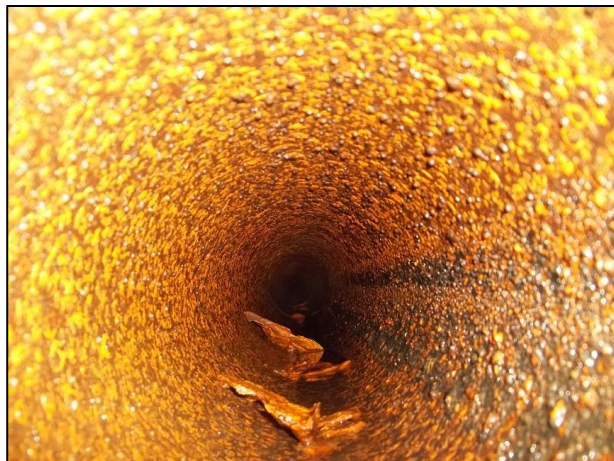

Cambridge, Ontario – Coal Tar and Corrosion Removal

